



CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

本翻译文件不具有法律效力，
不得单独使用
This translated document
does not have legal validity and
cannot be used in isolation

CERTIFICATE NO.: 2024010304634248

NAME AND ADDRESS OF THE APPLICANT

DELIXI ELECTRIC LTD

Delixi High Tech Industrial Park, Liushi Town, Yueqing City, Zhejiang Province, 325604, P.R.China

NAME AND ADDRESS OF THE MANUFACTURER

DELIXI ELECTRIC LTD

Delixi High Tech Industrial Park, Liushi Town, Yueqing City, Zhejiang Province, 325604, P.R.China

NAME AND LOCATION OF THE FACTORY

DELIXI ELECTRIC (WUHU) LTD

Wuhu Machinery Industrial Park, Wuhu City, Anhui Province, 241100, P.R.China

PRODUCT NAME,MODEL AND SPECIFICATION

AC Contactor

CJX2s-75(N), CJX2s-80(N), CJX2s-95(N), CJX2s-100(N), CJX2s-80(N)11A, CJX2s-95(N)11A, CJX2v-80(N), CJX2v-95(N), CJX2H-80(N), CJX2H-95(N), CJX2H-80(N)Z, CJX2H-95(N)Z, CJX2D-80(N)A, CJX2D-95(N)A ; See the Appendix

STANDARDS AND TECHNICAL REQUIREMENTS FOR THE PRODUCTS

GB/T 14048.4-2020

This is to certify that the above mentioned product(s) complies with the requirements of implementation rules for compulsory certification(REFNO. CNCA-C03-02:2024).

Valid from: Nov.03,2025

Valid until: May.27,2029

Date of original issued: May.28,2024

The certificate information and validity could be checked by scanning the QR code below or logging in to the website of the issuing authority, or on the website of the CNCA (www.cnca.gov.cn).



SIGNATURE:

谢肇煦



中国质量认证中心
CHINA QUALITY CERTIFICATION CENTRE

CHINA QUALITY CERTIFICATION CENTRE CO., LTD.





CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

本翻译文件不具有法律效力，
不得单独使用
This translated document
does not have legal validity and
cannot be used in isolation

CERTIFICATE NO. : 2024010304634248

Appendix: Page 1 of 3

CJX2s-75(N), CJX2s-80(N), CJX2s-95(N), CJX2s-100(N), CJX2s-80(N)11A, CJX2s-95(N)11A,
CJX2v-80(N), CJX2v-95(N), CJX2H-80(N), CJX2H-95(N), CJX2H-80(N)Z, CJX2H-95(N)Z,
CJX2D-80(N)A, CJX2D-95(N)A

Ui:690V;

Uimp:6kV;

Ith:125A;

Utilization category:AC-3, AC-4;

CJX2s-75(N):

AC-3:Ue/Ie:AC220V/230V/75A,AC380/400V/75A,AC660/690V/49A;

AC-4:Ue/Ie: AC220V/230V/37A,AC380V/400V/37A,AC660/690V/17.3A;

CJX2s-80(N), CJX2s-80(N)11A, CJX2v-80(N), CJX2H-80(N), CJX2H-80(N)Z,CJX2D-80(N)A:

AC-3:Ue/Ie:AC220V/230V/80A,AC380/400V/80A,AC660/690V/49A;

AC-4:Ue/Ie: AC220V/230V/37A,AC380V/400V/37A,AC660/690V/17.3A;

CJX2s-95(N), CJX2s-95(N)11A, CJX2v-95(N), CJX2H-95(N); CJX2H-95(N)Z, CJX2D-95(N)A:

AC-3:Ue/Ie:AC220V/230V/95A,AC380/400V/95A,AC660/690V/49A;

AC-4:Ue/Ie: AC220V/230V/44A,AC380V/400V/44A, AC660/690V/21.3A;

CJX2s-100(N):

AC-3:Ue/Ie:AC220V/230V/100A,AC380/400V/100A,AC660/690V/49A;

AC-4:Ue/Ie: AC220V/230V/44A,AC380V/400V/44A, AC660/690V/21.3A;

Us: AC24V,36V,48V,110V,127V,220V/230V,240V,380V/400V,415V,440V,50Hz,50/60Hz;

DC24V~48V,110V~250V(DC control voltage only applies to CJX2H-Z);

IP20 (Except terminal);

Poles:3P;

Attached Auxiliary Contacts: (Noumenon)

1NO1NC;

Ith:10A;

AC-15:Ue/Ie:AC220V/1.6A,AC380V/0.95A;

DC-13:Ue/Ie:DC220V/0.15A

This page is attached to the certificate and should be used at the same time as the certificate page.



中国质量认证中心
CHINA QUALITY CERTIFICATION CENTRE

CHINA QUALITY CERTIFICATION CENTRE CO., LTD.



CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

CERTIFICATE NO. : 2024010304634248

Appendix: Page 2 of 3

Type description:

CJX	2s	-	□□	□	□	□	
							常闭辅助触头组
							常开辅助触头组
							常规: 省略不写 N:可逆式交流接触器
							AC-3 使用类别下 380V/400V 时的额定工作电流值
							设计序号
							交流接触器

CJX	2s	-	□□	□	1	1	A
							设计序号
							常闭辅助触头组
							常开辅助触头组
							常规: 省略不写 N:可逆式交流接触器
							AC-3 使用类别下 380V/400V 时的额定工作电流值
							设计序号
							交流接触器

This page is attached to the certificate and should be used at the same time as the certificate page.



中国质量认证中心
CHINA QUALITY CERTIFICATION CENTRE

CHINA QUALITY CERTIFICATION CENTRE CO., LTD.




CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION


CERTIFICATE NO. : 2024010304634248

Appendix: Page 3 of 3


本翻译文件不具有法律效力，
不得单独使用
This translated document
does not have legal validity and
cannot be used in isolation

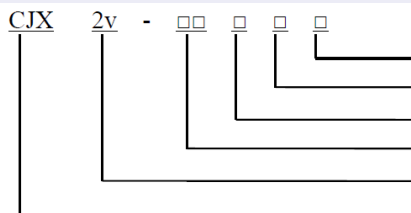

常闭辅助触头组
常开辅助触头组
常规: 省略不写 N:可逆式交流接触器
AC-3 使用类别下 380V/400V 时的额定工作电流值
设计序号
交流接触器

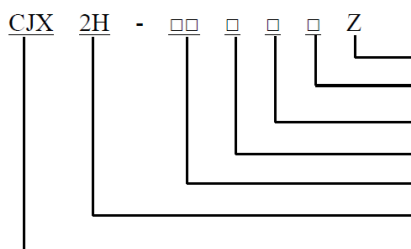

直流控制型号
常闭辅助触头组
常开辅助触头组
常规: 省略不写 N:可逆式交流接触器
AC-3 使用类别下 380V/400V 时的额定工作电流值
设计序号
交流接触器

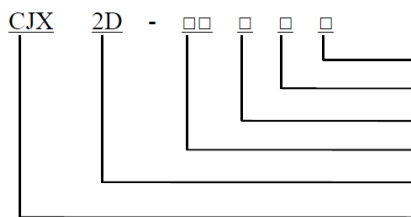

常闭辅助触头组
常开辅助触头组
常规: 省略不写 N:可逆式交流接触器
AC-3 使用类别下 380V/400V 时的额定工作电流值
设计序号
交流接触器

注: 常开、常闭辅助触头对数及组合型号: 11

This page is attached to the certificate and should be used at the same time as the certificate page.



中国质量认证中心
CHINA QUALITY CERTIFICATION CENTRE

CHINA QUALITY CERTIFICATION CENTRE CO., LTD.