

# F3 Power Switch

## HY2 reversing switch



### Selection Guide


| Product name | Rated working current    |
|--------------|--------------------------|
| HY2          | <input type="checkbox"/> |
|              | 15:7A                    |
|              | 30:12A                   |
|              | 60:20A                   |

### Technical parameters

| Model and specification              | HY2-15    | HY2-30 | HY2-60 |
|--------------------------------------|-----------|--------|--------|
| Conventional heating current (Ith) A | 15        | 30     | 60     |
| Rated working current (Ie) A         | 7         | 12     | 20     |
| Rated operating power kW Ue=380V     | 3         | 5.5    | 10     |
| Ue=220V                              | 1.8       | 3      | 5.5    |
| National Standard                    | GB14048.3 |        |        |
| Certificate                          | CCC       |        |        |



### Outline and installation dimension (mm)

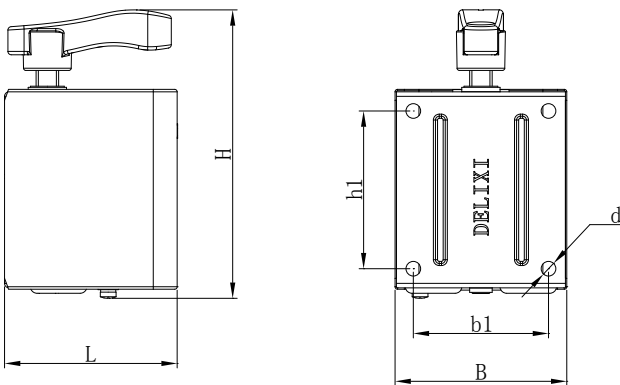

| Model     | External dimensions |    |     | Installation dimensions |    |      |
|-----------|---------------------|----|-----|-------------------------|----|------|
|           | L                   | B  | H   | h1                      | b1 | d    |
| HY2-15    | 78                  | 78 | 130 | 70                      | 60 | Φ6.5 |
| HY2-30/60 | 90                  | 88 | 150 | 80                      | 64 | Φ7   |

### Wiring diagram

