

F4 Automatic Control Switch

KG316TD Series Time Control Switch

Selection Guide



Product name	Function and installation form	Rated control supply voltage
KG316T	D	☐
	D: Standard installation rail type (35mm) installation, automatic control of ten opening and ten closing times	220:AC220V 380:AC380V

Product features

- AC frequency 50Hz, rated control power supply voltage AC380V and below
- Play parts of timing control in street lamps, neon lights, advertising sign lights, broadcasting and television equipment and all circuit equipment that need to be turned on and off regularly and similar purposes of household appliance.


Technical parameters

Contact capacity	(Resistive) V·A	250·20(AC)
Travel time error/daily	s	≤5
Mechanical life	Times	≥1×10 ⁶
Electrical life	Times	≥1×10 ⁵
Power consumption		≤3
Rated control supply voltage		220(AC), 380(AC)
Control time		1min ≤ t ≤68h (controlled by daily or weekly cycle timing time)

F4 Automatic Control Switch

KG316TD Series Time Control Switch

Outline and installation dimension (mm)

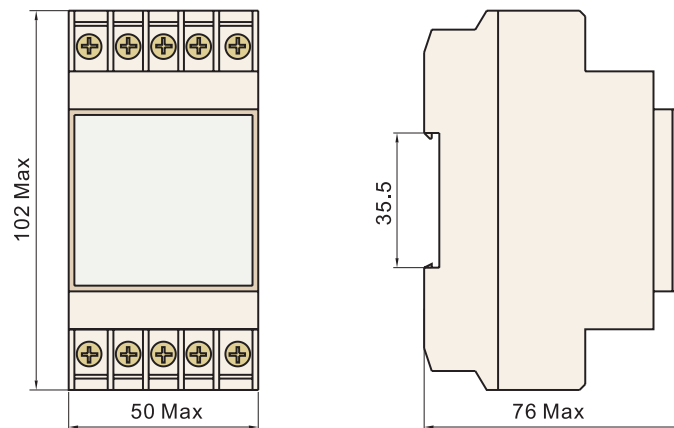

Wiring diagram

