

F4 Automatic Control Switch

KG816B Time Control Switch



Selection Guide

Product name	Control supply voltage U_s
KG816B	☐ 220:AC220V 380:AC380V

Product features

- KG816B time control switch is applicable to control circuit with AC 50/60Hz and voltage below 220V and it acts as delay timing component.
- It can switch on or off the power supply of various control circuits according to the predetermined time, and is suitable for street lamps, neon lamps, advertising signboard lamps, broadcasting and television equipment and various household appliances.


Technical parameters

Conventional heating current 1th	A 10
AC-15 U_e	V 380/240
I_e	A 1.9/3
Control supply voltage U_s	AC220V, AC380V
Daily travel time error	The error of daily travel time shall not more than 2s (24 hours)
Switching times	8 opening and 8 closing actions can be set every day
Mechanical life	Times ≥ 1 million
Electrical life	Times ≥ 100 thousand

F4 Automatic Control Switch

KG816B Time Control Switch

Outline and installation dimension (mm)

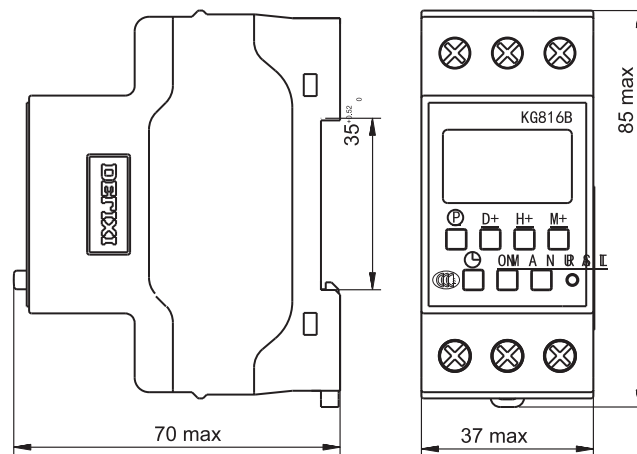

Wiring diagram

